

---

## **Urban areas parameterisation for CFD simulation and cities air quality analysis.**

---

**Maria Grazia Badas\* , Luca Salvadori, Michela Garau, Giorgio Querzoli and Simone Ferrari**

DICAAR - Dipartimento di Ingegneria Civile, Ambientale e Architettura, Università degli Studi di Cagliari,  
via Marengo 2, 09123 Cagliari, Italy  
Email: mgbadas@unica.it  
Email: luca.salvadori@unica.it  
Email: mi.garau@unica.it  
Email: querzoli@unica.it  
Email: ferraris@unica.it

\*Corresponding author

**Abstract:** The aim of this work is to highlight the importance of a site-specific characterization of urban areas needed for Computational Fluid Dynamics (CFD) simulations and urban air quality studies. As a case study, we consider Cagliari, an Italian town, whose heterogeneous urban texture can be representative of many European historical towns, quite different from large American cities that are generally analysed in literature. Basic steps needed to compute the main morphometric and fluid dynamics parameters from Digital Elevation Models (DEM) are reviewed and some possible caveats on using gridded DEM analysis are highlighted. Results show how site-specific analysis provides quite different parametrisations from those obtained by literature results, which cannot be transposed to other urban contexts. Morphometric site-specific analysis represents a key issue in urban numerical simulations, since the application of non-representative morphometric input data may dramatically affect their results.

**Keywords:** *Morphometric Parameters, Urban Aerodynamic Roughness, Urban Canopy Model.*

**Reference** to this paper should be made as follows: Badas, M.G., Salvadori, L., Garau, M., Querzoli, G. and Ferrari, S. (2019) 'Urban areas parameterisation for CFD simulation and cities air quality analysis', *Int. J. Environment and Pollution, Vol. xx, xxxxxxxx*,

**Biographical notes:**

## *Author*

*Maria Grazia Badas has been an Aggregate Professor in Hydraulics II at the University of Cagliari (Italy), since 2006. She received her PhD in Territorial Engineering from the University of Cagliari in 2005. Her research topics include turbulence and mixing in civil, environmental and biological flows.*

*Luca Salvadori is a PhD student in Civil Engineering and Architecture. His main research topics are about pollutant dispersion in environmental flows, especially related to problem solutions like urban sites characterization methods.*

*Michela Garau is a PhD student in Civil Engineering and Architecture. Her main research interests include boundary layer meteorology, numerical modelling of urban canopies and dispersion models.*

*Giorgio Querzoli has been a Full Professor in Fluid Mechanics at the University of Cagliari, Italy since 2006. He received his PhD in Environmental Monitoring at the University of Florence, Italy in 1996. He teaches 'Hydraulics' and 'Environmental Hydraulics'. His research topics are turbulence and dispersion in biologic and environmental flows, such as atmospheric boundary layer and ocean outfalls.*

*Simone Ferrari has been an Aggregate Professor in Fluid Mechanics at the University of Cagliari (Italy), since 2011. He received his PhD in Territorial Engineering from the University of Cagliari, in collaboration with the Imperial College London (UK) in 2007. His research interests include turbulence and mixing in civil, environmental, industrial and biological flows.*

---

## **1 INTRODUCTION**

An appropriate description of the interaction between the air flows and the built environment is essential when performing numerical simulations, no matter of the target application and the spatial scales involved. Actually, when running mesoscale models aimed at weather forecasting and air quality prediction on large areas, the parametrization of the average effect of the small-scale atmospheric processes is highly complex due to the nonlinear processes involved as well as to land heterogeneities, especially in urban context (Arnfield, 2003; Pelliccioni et al., 2016). This is a critical issue which can be further complex in case of unstable and convective boundary layers, where more complex spatial structures may arise also in case of flat terrain (Badas and Querzoli, 2011), and nonlocal mixing should be properly considered. Although been a nontrivial issue, the positive effect of their adequate characterization has been widely demonstrated (Salamanca et al., 2010; Chen et al., 2011).

Indeed, the characterisation of the urban areas is fundamental also for microscale models, which require more detailed descriptions of the urban

morphology, rather than a parametrization representing its average effect on the complex physical processes, as required by mesoscale models.

Moreover, when numerical simulations are performed at neighbourhood or building scale, as in Computational Fluid Dynamics (CFD) models, the proper description of the urban surrounding is necessary for two purposes. It is needed to set the urban roughness length in the regions surrounding the target area, which are not explicitly modelled although included in the simulation domain, as well as to define appropriate approaching wind boundary condition (Blocken, 2015; Pelliccioni et al., 2015).

Urban canopy parameterization and fluid dynamic parameters, needed for the above reasons, are generally developed on the basis of simple urban configurations, which consider the urban canyon as the fundamental unit. Specifically, urban canopy models used in large scale numerical simulations can be broadly divided into single-layer (e.g., Masson, 2000) and multi-layer (e.g. Martilli et al., 2002) models. This is the reason why studies performed on simple configurations, including two-dimensional urban canyons are valuable (Badas et al., 2017; Ferrari et al., 2017; Garau et al., 2018).

In his pioneering work, Oke (1988) highlighted how canyon flow characteristics depend on the Canyon Aspect Ratio ( $AR_c$ ), defined by the ratio between the canyon width ( $w_c$ ) and the mean building height ( $\overline{z_H}$ ) (Figure 1a).

$$AR_c = \frac{w_c}{\overline{z_H}} \quad (1)$$

Other authors, e.g. Hang and Li (2011), Chan et al. (2003) and (Garau et al., 2017), showed the influence of the Building Aspect Ratio ( $AR_b$ ), i.e. the ratio between the building width ( $w_b$ ) and the building height ( $\overline{z_H}$ ):

$$AR_b = \frac{w_b}{\overline{z_H}} \quad (2)$$

As an example, Figure 2 shows how deeply canyon mean flow, in case of  $AR_b = 1$ , changes between  $AR_c = 1$  (Figure 2a) and  $AR_c = 0.5$  (Figure 2b). Data were obtained experimentally in a water flume, applying in-house two frame particle tracking velocimetry (Besalduch et al., 2014,

2013; Falchi et al., 2006). Higher order statistics, and the street canyon ventilation are also strongly affected by the canyon morphology (Badas et al., 2017; Bernardino et al., 2015; Garau et al., 2018b). These effects can also become more evident when thermal effects are considered in the street canyon (Nazarian and Kleissl, 2016) or when the urban morphology interacts with different atmospheric conditions, such as in case of a Convective Boundary Layer, a situation where more complex and localized spatial structures arise also in case of flat terrain (Badas and Querzoli, 2011).

Grimmond and Oke (1999) proposed a morphometric characterisation method to estimate aerodynamic parameters. They described building shapes and proportions schematically and defined the associated parameters empirically. Of course, an elementary unit must first be defined in order to fulfil a morphometric study. Fundamental measurements involved in the elementary unit description are sketched in Figure 1b. Apart from the yet cited  $\overline{z_H}$ , the other parameters are the building planar area  $A_P$ , the building frontal area, along a specific direction,  $A_F$ , and the total planar area of the element (considering the building pertinent area)  $A_T$ . Building projection area on a certain plane ( $A_F$ ) varies with the direction that defines that plane, being its normal. Two morphometric parameters, namely Plan Area Index ( $\lambda_p$ ) and Frontal Area Index ( $\lambda_f$ ) can be defined:

$$\lambda_p = \frac{A_P}{A_T} \quad (3)$$

$$\lambda_f = \frac{A_F}{A_T} \quad (4)$$

When two-dimensional canyons are considered, the relationship between the two set of parameters becomes:

$$\lambda_p = \frac{w_b}{w_b + w_c} ; \quad \lambda_f = \frac{\overline{z_H}}{w_b + w_c} \quad (5)$$

Today, morphological analysis is greatly aided by geospatial data availability. Recently, the urban boundary layer parameterization project, NUDAPT (National Urban Database and Access Portal Tool), was created to provide accurate and homogeneous urban dataset on more than 40 American cities (Ching et al., 2009). Other initiatives have been developed

in this field, however most studies are performed in American cities, whilst European and, in particular, Italian urban areas have received less attention.

Without a specific and accurate morphometric parameter dataset, input model parameters related to urban structure have to be derived from available datasets and reference values, not necessarily respondent to the specific condition. This may have not negligible effects on the simulation outcomes. Hence, it is fundamental to perform morphometric analysis of different sites in order to develop more accurate parameterizations, and also to configure laboratory set-ups to provide a database for validation with ad-hoc morphologies.

Moreover, another aspect deserves attention: generally morphometric studies are performed on gridded data on a regular grid (Burian et al., 2002; Ratti et al., 2002, 2006; Di Sabatino et al., 2010). Other approaches are performed on adaptive grids or irregular elements based on Voronoi polygons (Ketterer et al., 2017). Actually, results can be significantly affected by element selection, and the choice of the most appropriate methodology should be investigated.

The work presents a morphologic analysis of Cagliari, an Italian town, quite representative of many historical European towns, with the aim to present a GIS based methodology and to discuss the outcomes of a regular or irregular grid choice.

## **2 METHODS**

Thanks to the availability of geospatial data, the analysis described above can be conveniently performed and automated. The procedure here implemented is based on a Digital Surface Model (DSM) and a Digital Terrain Model (DTM), both at 1 m resolution (WGS84/UTM32N-EPSSG:32632 reference system). Moreover, we used building and street vectorised datasets. These datasets were retrieved for our case study, Cagliari (Figure 3a), from “Sardegna Geoportale” (<http://www.sardegnaoportale.it/navigatori/sardegnamappe/>). Data analysis was automated using QGIS and MATLAB® software, as better detailed in the following.

A GIS analysis is the first step of a general methodology, and it allows

a simple data viewing, a pre-processing phase and data manipulation. The building heights dataset was obtained subtracting DSM from DTM; it is referred to the street topographic level and was used for the following analyses. Some morphometric parameters were computed from a GIS procedure; e.g. it is possible to calculate  $\lambda_p$  with simple logical operations on building data, once the adopted grid type is defined. Others, such as  $\lambda_f$ , were processed in MATLAB®, using the *Mapping Toolbox*. As an example, Figure 3b shows the rotation of irregular grid elements, necessary to define building projection on the wind direction and to compute corresponding  $\lambda_f$ . Street and building vector data were processed to determine direction, distances and other geometrical information, in addition to associating raster height data to building elements.

The computation of  $\lambda_p$  and  $\lambda_f$  parameters was also used to derive Zero Plane Displacement Length ( $z_d$ ) and Roughness Length ( $z_0$ ). These fluid dynamics parameters are used in CFD models to define the incident wind profile:

$$u(z) = \frac{u_*}{k} \ln\left(\frac{z - z_d}{z_0}\right) \quad (6)$$

where  $u$  is the flow speed at height  $z$ ,  $u_*$  is the friction velocity and  $k$  is the von Karman constant. This formulation is rather questionable in urban context (Fernando, 2010) because of the patterns high inhomogeneity, however the morphometric parameters are usually calculated under simplified conditions.

Several morphometric methods have been developed and tested in order to derive  $z_d$  and  $z_0$  (Grimmond and Oke, 1999). A review of the different formulas and the choice of the most appropriate method goes beyond the scope of the present investigation. Different methods were tested for our case study, but apart from the obvious differences in numerical results, they all reflected the heterogeneous urban morphology in  $z_d$  and  $z_0$  maps, as described in Section 3.

In the following, we present the results obtained applying the MacDonald method:

$$\frac{z_d}{z_H} = 1 + \alpha^{-\lambda_p} (\lambda_p - 1) \quad (7)$$

*Title*

$$\frac{z_0}{z_H} = \left(1 - \frac{z_d}{z_H}\right) \exp \left\{ - \left[ 0.5\beta \frac{C_D}{k^2} \left(1 - \frac{z_d}{z_H}\right) \lambda_f \right]^{-0.5} \right\} \quad (8)$$

where  $\alpha$  and  $\beta$  are empirical coefficients and  $C_D$  is the drag coefficient. The authors suggested using  $\alpha = 4.43$ ,  $\beta = 1.0$ ,  $C_D = 1.2$ , and we adopted the same values. MacDonald formulas were obtained considering an urban building schematization, so we considered these as the most representative among proposed methods.

In order to compare the outcome of the analysis performed on regular square grids and irregular elements, assessments were carried out by means of three different settings: an irregular grid whose elements are defined on the street graph, hence following the shape of the building blocks (Figure 4a), a 50 m  $\times$  50 m gridded map (Figure 4b), a 100 m  $\times$  100 m gridded map (Figure 4c). Actually, different grid scales were employed for morphometric analyses (Ketterer et al., 2017; Ratti et al., 2002; Burian et al., 2002; Di Sabatino et al., 2010) and a consensus on defining a standard methodology has not been achieved by the scientific community yet (Fernando et al., 2010). Here, small scale grids were chosen to compare regular and irregular grid outcomes at similar resolutions as well as to investigate the town heterogeneity.

Indeed, the morphometric analysis was applied to Cagliari central neighbourhoods (Bonaria, Marina, Castello, Villanova, San Benedetto and Stampace – displayed in Figure 4d), which have a different historical development that is reflected in their urban texture and, therefore, into morphometric features. The obtained data were statistically analysed at each neighbourhood scale as well as considering the whole grids representing central Cagliari mean parameters.

### 3 RESULTS

Figure 4 shows colour maps of  $\lambda_p$  over the analysed urban area, computed on the three adopted grids. All the maps display a heterogeneous  $\lambda_p$  distribution, with notable difference from one neighbourhood to another one, whilst less variation is shown within each district. In order to quantitatively compare the results obtained with the three grids, Figure 5 shows  $\lambda_p$  and  $\lambda_f$  mean values with bars representing standard deviation for each neighbourhood and for the whole Cagliari urban area. Here,  $\lambda_f$  refers to the value averaged in every wind direction

*Author*

( $\lambda_f$  were computed at wind direction intervals of  $10^\circ$ ). Apart from the variability among the neighbourhoods, it is apparent how irregular grid mean values, both for  $\lambda_p$  and  $\lambda_f$ , are closer to those obtained for the 100 m grid with respect to the 50 m ones. Actually, the frontal area index,  $\lambda_f$ , is highly dependent on grid resolution and it generally decreases with increasing grid size. In fact, when larger grids are considered, buildings that would contribute to the frontal area,  $A_F$ , in case of smaller grids are partially shaded by forward buildings, thus determining lower  $\lambda_f$  values.

We also analysed the  $\lambda_f$  directional value, in order to better evaluate anisotropies, due to the building layout preferential direction, when facing the incident wind. Results obtained for three of the analysed neighbourhoods are displayed, as an example, in polar plots of Figure 6. A remarkable difference is apparent: while regular grid data show maximum values on the diagonal direction irrespective of the district analysed,  $\lambda_f$  polar plots computed on irregular element grids are notably different one from the other. Actually, the behaviour observed for the regular grids is prevalently driven by a geometrical reason of the grid itself, more than being a result of the specific urban layout. In fact, when square elements are considered, the frontal area that can be occupied by buildings is largest for wind direction of  $45^\circ$ , and this inevitably distorts the  $\lambda_f$  result. The same outcome is apparent from the  $\lambda_f$  polar plots obtained for whole Cagliari area and displayed in Figure 7. Cagliari  $\lambda_f$  values for the regular grids resemble those obtained by Ratti et al., (2002) for other cities (London, Toulouse, Berlin) using regular 100 m grids: they all have maxima around  $45^\circ$  directions, with Cagliari 100 m grid data almost overlapping Toulouse ones. Conversely, Cagliari irregular block results display an isotropic  $\lambda_f$  distribution, since the effect of the anisotropies highlighted in some neighbourhoods (and discussed above) are lost when averaging data at larger scales. Actually, we compared mean morphometric values since it is a common practise to use them as a reference in this context (Pelliccioni et al., 2016). Nonetheless, it should be pointed out that, for non-Gaussian statistical distributions, the choice of the mean value as the representative one is rather questionable. Moreover, from the modelling point of view, the focus is not the correct representation of the morphometric parameters as such, but their bulk effect on the urban boundary layer, which is usually represented using formulas developed from the analysis of regular urban outlines. This issue

deserves further investigations, which however goes beyond the scope of the present work.

The heterogeneous distribution of  $\lambda_p$  and  $\lambda_f$  values is reflected into the roughness length  $z_0$  map, computed according to MacDonald formula and displayed in Figure 8. In absence of such detailed studies, when urban roughness length  $z_0$  or zero displacement length  $z_d$  are needed, one might choose the appropriate values following the urban area classification by Grimmond and Oke (1999), whose reference values are displayed in Table 2. According to the description given by these authors, Cagliari should be classified as a C urban area (i.e. residential-closely spaced < six-story row and block buildings or major facilities like factories, university, etc., town centre). However, comparing Table 1 and 2, while  $z_d$  falls within the proposed range,  $z_0$  from the morphometric analysis is quite different from those obtained by Grimmond and Oke (1999). Moreover,  $z_0$  distribution is highly heterogeneous (Figure 8), hence its mean value may not be representative.

This confirms that using parameterizations obtained in other regions can be misleading, providing different mean parameters. Moreover, when simulating small portions of the city, in order to represent appropriate boundary conditions, aerodynamic parameters should be computed with reference to the upwind target area, possibly using directional morphometric data, instead of adopting averaged value, which may fail to well represent the specific urban context effect on the urban boundary layer.

#### **4 CONCLUSIONS**

Simulating air flows in urban contexts requires input parameters synthetically representing the complex interactions between the boundary layer and the built environment (Amicarelli et al., 2012). These parameterizations may have a great influence on the simulation results, both in case of air quality models (Di Bernardino et al., 2018) or in CFD context (Ferrari et al., 2016). From the analysis performed on Cagliari and here presented, we can draw some general conclusions. First of all, caution has to be considered when using literature data obtained in different urban contexts. Secondly, the complex town historical development is reflected into the heterogeneous distribution of morphometric parameters. Hence,

*Author*

their mean values computed over the whole town, may not be meaningful and, for some applications (such as a CFD study and pollutant dispersion modelling at a building or block scale, morphometric parameters should be first assessed at a homogeneous neighbourhood level, and then their bulk effect, averaged along the upwind fetch, should be estimated. Moreover, the comparison of  $\lambda_f$  computation for gridded dataset showed misleading results that can be conveniently overcome using irregular elements extracted from the street graph.

## 5 REFERENCES

- Amicarelli, A., Leuzzi, G., Monti, P., 2012. Lagrangian micromixing models for concentration fluctuations: an overview. *Am. J. Environ. Sci.* 8, 577–590.
- Arnfield, J.A., 2003. Two decades of urban climate research: a review of turbulence, exchanges of energy and water, and the urban heat island - Arnfield - 2003 - *International Journal of Climatology* - Wiley Online Library. *Int. J. Climatol.* 23, 1–26.
- Badas, M.G., Ferrari, S., Garau, M., Querzoli, G., 2017. On the effect of gable roof on natural ventilation in two-dimensional urban canyons. *J. Wind Eng. Ind. Aerodyn.* 162, 24–34. <https://doi.org/10.1016/j.jweia.2017.01.006>
- Badas, M.G., Querzoli, G., 2011. Spatial structures and scaling in the Convective Boundary Layer. *Exp. Fluids* 50, 1093–1107. <https://doi.org/10.1007/s00348-010-1020-z>
- Bernardino, A.D., Monti, P., Leuzzi, G., Querzoli, G., 2015. Water-Channel Study of Flow and Turbulence Past a Two-Dimensional Array of Obstacles. *Bound.-Layer Meteorol.* 155, 73–85. <https://doi.org/10.1007/s10546-014-9987-2>
- Besalduch, L.A., Badas, M.G., Ferrari, S., Querzoli, G., 2014. On the near field behavior of inclined negatively buoyant jets. *EPJ Web Conf.* 67, 02007. <https://doi.org/10.1051/epjconf/20146702007>
- Besalduch, L.A., Badas, M.G., Ferrari, S., Querzoli, G., 2013. Experimental Studies for the characterization of the mixing processes in negative buoyant jets. *EPJ Web Conf.* 45, 01012. <https://doi.org/10.1051/epjconf/20134501012>

*Title*

- Blocken, B., 2015. Computational Fluid Dynamics for urban physics: Importance, scales, possibilities, limitations and ten tips and tricks towards accurate and reliable simulations. *Build. Environ.*, Fifty Year Anniversary for Building and Environment 91, 219–245. <https://doi.org/10.1016/j.buildenv.2015.02.015>
- Burian, S.J., Velugubantla, S.P., Brown, M.J., 2002. Morphological analyses using 3D building databases: Phoenix, Arizona [WWW Document]. ResearchGate. URL [https://www.researchgate.net/publication/260286561\\_Morphological\\_analyses\\_using\\_3D\\_building\\_databases\\_Phoenix\\_Arizona](https://www.researchgate.net/publication/260286561_Morphological_analyses_using_3D_building_databases_Phoenix_Arizona) (accessed 3.16.18).
- Chan, A.T., Au, W.T.W., So, E.S.P., 2003. Strategic guidelines for street canyon geometry to achieve sustainable street air quality—part II: multiple canopies and canyons. *Atmos. Environ.* 37, 2761–2772. [https://doi.org/10.1016/S1352-2310\(03\)00252-8](https://doi.org/10.1016/S1352-2310(03)00252-8)
- Chen, F., Kusaka, H., Bornstein, R., Ching, J., Grimmond, C.S.B., Grossman-Clarke, S., Loridan, T., Manning, K.W., Martilli, A., Miao, S., Sailor, D., Salamanca, F.P., Taha, H., Tewari, M., Wang, X., Wyszogrodzki, A.A., Zhang, C., 2011. The integrated WRF/urban modelling system: development, evaluation, and applications to urban environmental problems, in: *INTERNATIONAL JOURNAL OF CLIMATOLOGY*. Presented at the 7th International Conference on Urban Climate (ICUC-7), pp. 273–288. <https://doi.org/10.1002/joc.2158>
- Ching, J., Brown, M., Burian, S., Chen, F., Cionco, R., Hanna, A., Hultgren, T., McPherson, T., Sailor, D., Taha, H., Williams, D., 2009. National Urban Database and Access Portal Tool. *Bull. Am. Meteorol. Soc.* 90, 1157–1168. <https://doi.org/10.1175/2009BAMS2675.1>
- Di Bernardino, A., Monti, P., Leuzzi, G., Querzoli, G., 2018. Pollutant fluxes in two-dimensional street canyons. *Urban Clim.* 24, 80–93. <https://doi.org/10.1016/j.uclim.2018.02.002>
- Di Sabatino, S., Leo, L.S., Cataldo, R., Ratti, C., Britter, R.E., 2010. Construction of Digital Elevation Models for a Southern European City and a Comparative Morphological Analysis with Respect to Northern European and North American Cities. *J. Appl. Meteorol. Climatol.* 49, 1377–1396. <https://doi.org/10.1175/2010JAMC2117.1>

*Author*

- Falchi, M., Querzoli, G., Romano, G.P., 2006. Robust evaluation of the dissimilarity between interrogation windows in image velocimetry. *Exp. Fluids* 41, 279–293. <https://doi.org/10.1007/s00348-006-0148-3>
- Fernando, H.J.S., 2010. Fluid Dynamics of Urban Atmospheres in Complex Terrain. *Annu. Rev. Fluid Mech.* 42, 365–389. <https://doi.org/10.1146/annurev-fluid-121108-145459>
- Fernando, H.J.S., Zajic, D., Di Sabatino, S., Dimitrova, R., Hedquist, B., Dallman, A., 2010. Flow, turbulence, and pollutant dispersion in urban atmospheres. *Phys. Fluids* 22, 051301. <https://doi.org/10.1063/1.3407662>
- Ferrari, S., Badas, M.G., Garau, M., Querzoli, G., Seoni, A., 2017. The air quality in narrow two-dimensional urban canyons with pitched and flat roof buildings. *International Journal of Environment and Pollution*, 62: 347-368, 10.1504/IJEP.2017.089419
- Ferrari, S., Badas, M.G., Garau, M., Seoni, A., Querzoli, G., 2016. The air quality in two-dimensional urban canyons with gable roof buildings: A numerical and laboratory investigation. Presented at the HARMO 2016 - 17th International Conference on Harmonisation within Atmospheric Dispersion Modelling for Regulatory Purposes, Proceedings, pp. 351–356.
- Garau, M., Badas, M.G., Ferrari, S., Seoni, A., Querzoli, G., 2018a. Turbulence and Air Exchange in a Two-Dimensional Urban Street Canyon Between Gable Roof Buildings. *Bound.-Layer Meteorol.* 167, 123–143. <https://doi.org/10.1007/s10546-017-0324-4>
- Garau, M., Badas, M.G., Ferrari, S., Seoni, A., Querzoli, G., 2018b. Air Exchange in urban canyons with variable building width: a numerical LES approach. *Spec. Issue HARMO18 (Under review)*.
- Garau, M., Grazia, B., Ferrari, S., Seoni, A., Querzoli, G., 2017. The air quality in urban canyons with tight and wide buildings. Presented at the HARMO 2017 - 18th International Conference on Harmonisation within Atmospheric Dispersion Modelling for Regulatory Purposes, Proceedings, pp. 470–474.

*Title*


- Grimmond, C.S.B., Oke, T.R., 1999. Aerodynamic Properties of Urban Areas Derived from Analysis of Surface Form. *J. Appl. Meteorol.* 38, 1262–1292. [https://doi.org/10.1175/1520-0450\(1999\)038<1262:APOUAD>2.0.CO;2](https://doi.org/10.1175/1520-0450(1999)038<1262:APOUAD>2.0.CO;2)
- Hang, J., Li, Y., 2011. Age of air and air exchange efficiency in high-rise urban areas and its link to pollutant dilution. *Atmos. Environ.* 45, 5572–5585. <https://doi.org/10.1016/j.atmosenv.2011.04.051>
- Ketterer, C., Gangwisch, M., Fröhlich, D., Matzarakis, A., 2017. Comparison of selected approaches for urban roughness determination based on voronoi cells. *Int. J. Biometeorol.* 61, 189–198. <https://doi.org/10.1007/s00484-016-1203-2>
- Martilli, A., Clappier, A., Rotach, M.W., 2002. An Urban Surface Exchange Parameterisation for Mesoscale Models. *Bound.-Layer Meteorol.* 104, 261–304. <https://doi.org/10.1023/A:1016099921195>
- Masson, V., 2000. A Physically-Based Scheme For The Urban Energy Budget In Atmospheric Models. *Bound.-Layer Meteorol.* 94, 357–397. <https://doi.org/10.1023/A:1002463829265>
- Nazarian, N., Kleissl, J. 2016. Realistic solar heating in urban areas: air exchange and street-canyon ventilation. *Build Environ.* 95: 75–93. <https://doi.org/10.1016/j.buildenv.2015.08.021>
- Oke, T.R., 1988. Street design and urban canopy layer climate. *Energy Build.* 11, 103–113. [https://doi.org/10.1016/0378-7788\(88\)90026-6](https://doi.org/10.1016/0378-7788(88)90026-6)
- Pelliccioni, A., Monti, P., Leuzzi, G., 2016. Wind-Speed Profile and Roughness Sublayer Depth Modelling in Urban Boundary Layers. *Bound.-Layer Meteorol.* 160, 225–248. <https://doi.org/10.1007/s10546-016-0141-1>
- Pelliccioni, A., Monti, P., Leuzzi, G., 2015. An alternative wind profile formulation for urban areas in neutral conditions. *Environ. Fluid Mech.* 15, 135–146. <https://doi.org/10.1007/s10652-014-9364-1>
- Ratti, C., Sabatino, S.D., Britter, R., 2006. Urban texture analysis with image processing techniques: winds and dispersion. *Theor. Appl. Climatol.* 84, 77–90. <https://doi.org/10.1007/s00704-005-0146-z>
- Ratti, C., Sabatino, S.D., Britter, R., Brown, M., Caton, F., Burian, S., 2002. Analysis of 3-D Urban Databases with Respect to Pollution Dispersion for a Number of

Author

European and American Cities. *Water Air Soil Pollut. Focus* 2, 459–469.  
<https://doi.org/10.1023/A:1021380611553>


Salamanca, F., Martili, A., Tewari, M., Chen, F., 2010. A Study of the Urban Boundary Layer Using Different Urban Parameterizations and High-Resolution Urban Canopy Parameters with WRF. *J. Appl. Meteorol. Climatol.* 50, 1107–1128.  
<https://doi.org/10.1175/2010JAMC2538.1>

## FIGURES

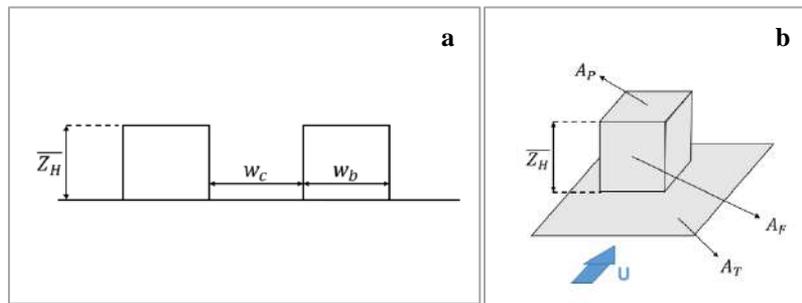


**Figure 1.** Basic parameters to define (a) urban canyon aspect ratios ( $AR_c = w_c/\overline{z_H}$ ,  $AR_b = w_b/\overline{z_H}$ ); (b) planar ( $\lambda_P = A_P/A_T$ ) and frontal ( $\lambda_F = A_F/A_T$ ) area indexes.


Title

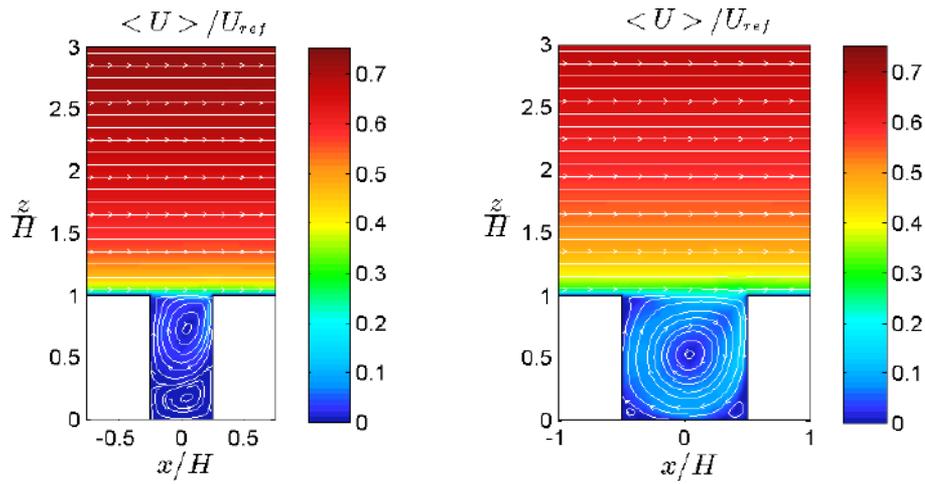

**Figure 2:** Non dimensional velocity field colormap, with superimposed streamlines in urban canyons with  $AR_b = 1.0$  and  $AR_c = 0.5$  (a) and  $AR_c = 1$  (b). Velocity field is made non dimensional by the free stream velocity  $U_{ref}$  at the top of the domain  $z/H=9$ .

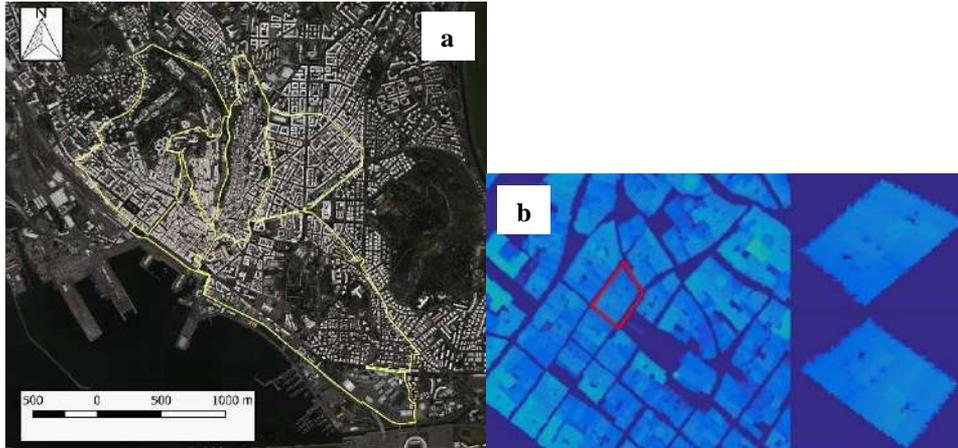


**Figure 3.** (a): Cagliari planimetric map, yellow lines highlight neighbourhood subdivision; (b) identification of an isolated building pertinent area and its rotation for  $\lambda_f$  calculation.

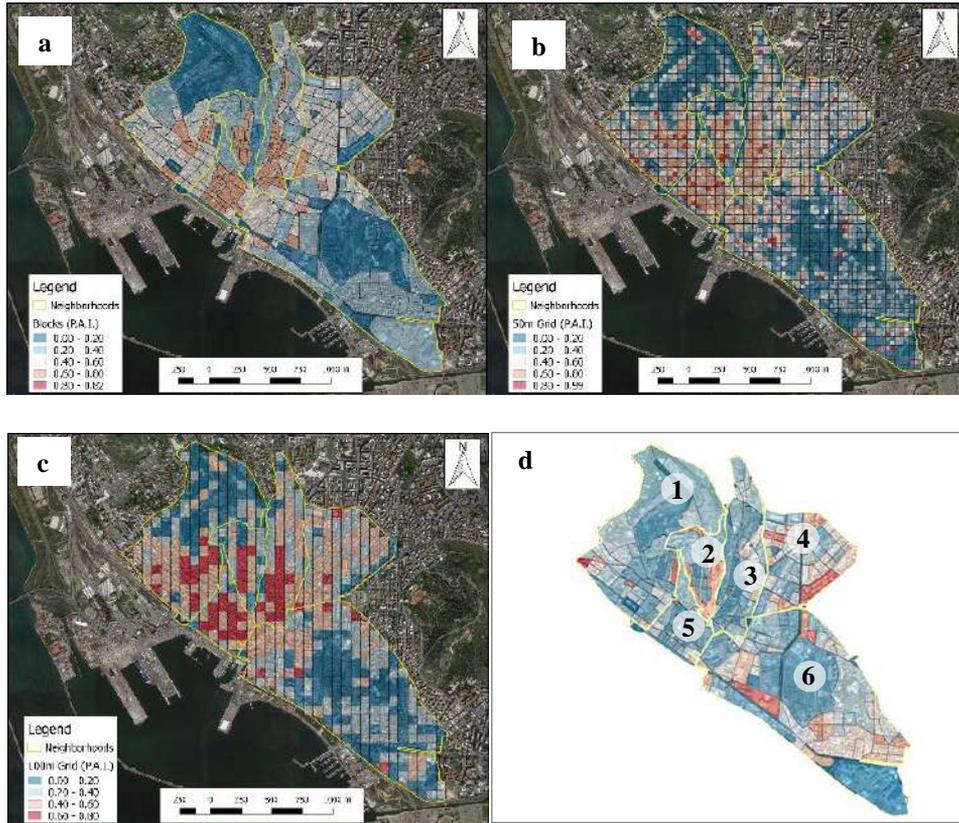


**Figure 4.**  $\lambda_p$  colormap distribution on Cagliari urban area computed from subdivision in irregular blocks (a), gridded elements at 50 m (b) and 100 m (c). Yellow lines highlight neighbourhood subdivision: Stampace (1), Castello (2), Villanova (3), San Benedetto (4), Marina (5), Bonaria (6), as displayed in plot (d).

Title

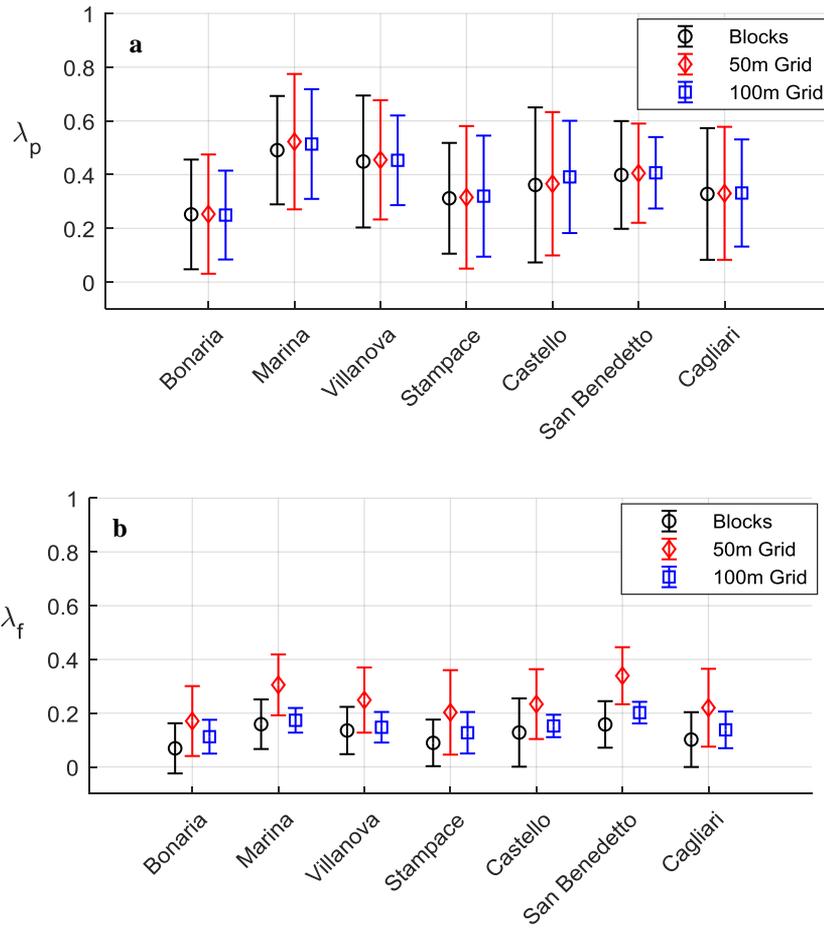


**Figure 5.**  $\lambda_p$ (a) and  $\lambda_f$ (b) mean values with standard deviation bars computed on each neighbourhood and the overall studied urban area, as obtained from subdivision in irregular blocks (black), gridded elements at 50 m (red) and 100 m (blue).

Author

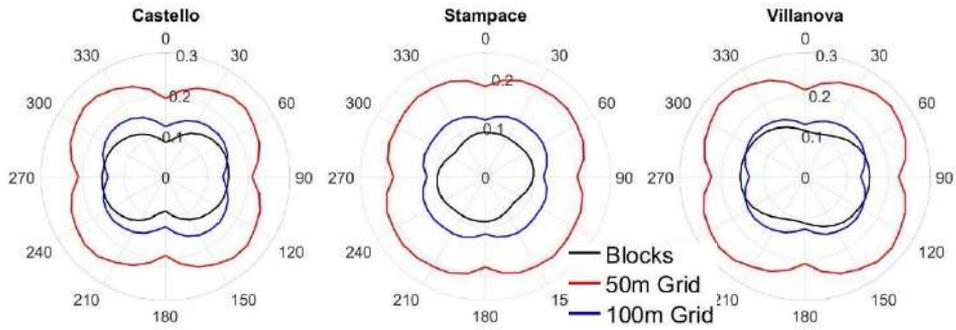


**Figure 6.**  $\lambda_f$  polar plots computed for the corresponding wind direction for three Cagliari neighbourhoods, using subdivision in irregular blocks (black line), regular gridded elements at 50 m (red line) and 100 m (blue line).

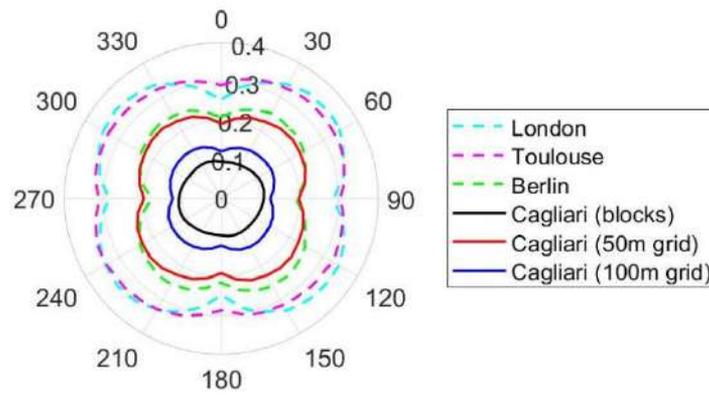

**Figure 7.**  $\lambda_f$  polar plots for the whole Cagliari area using subdivision in irregular blocks (black line), gridded elements at 50 m (red line) and 100 m (blue line) compared with other study cases performed on regular grids (dotted lines).

Title

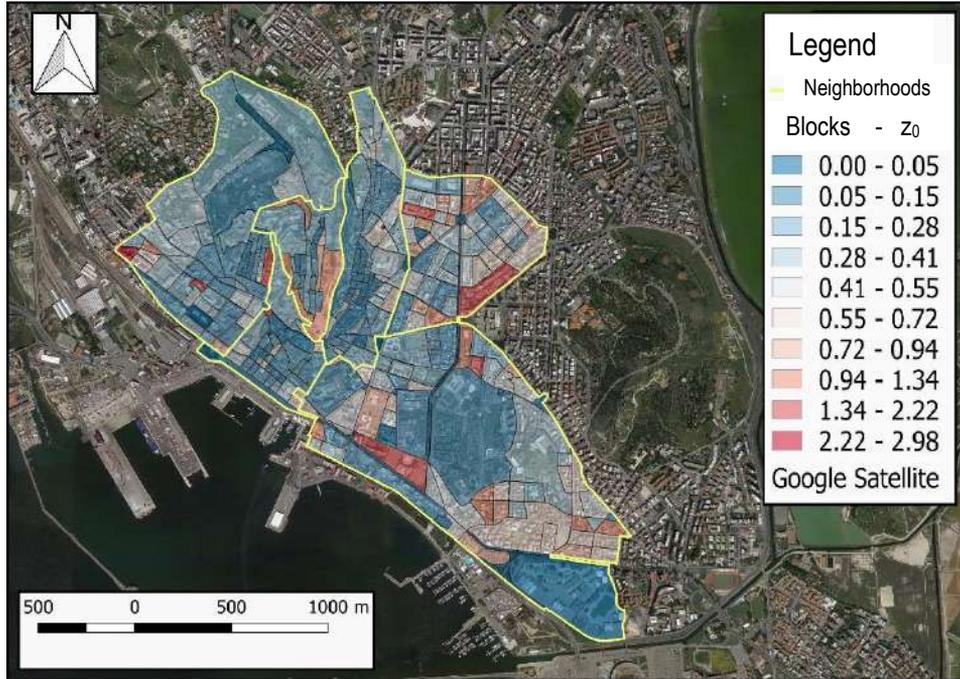

**Figure 8.** Urban roughness,  $z_0$ , colormap obtained by using irregular blocks on Cagliari

## TABLES

**Table 1:** Comparison between aerodynamic properties obtained for Cagliari and available literature data for some other European cities.

Site	$z_H$ (m)	$\lambda_p$ (-)	$\lambda_f$ (-)	$z_d$ (m)	$z_0$ (m)
<b>Cagliari</b>	21	0.33	0.10	10.7	0.47
<b>Berlino</b>	20	0.35	0.23	12.1	1.18
<b>Tolosa</b>	16	0.40	0.32	10.9	0.92
<b>Londra</b>	15	0.55	0.32	11.9	0.30

**Table 2:** Aerodynamic parameters for the four urban area classes defined by Grimmond and Oke, (1999), ordered by height and density.

Class	$z_H$ (m)	$z_d$ (m)	$z_0$ (m)	Urban Surface Form
<b>A</b>	5-8	2-4	0.3-0.8	Low height and density
<b>B</b>	7-14	3.5-8	0.7-1.5	Medium height and density

*Author*

<b>C</b>	11-20	7-15	0.8-1.5	Tall and height density
<b>D</b>	>20	>12	>2.0	High-rise

---